


Hydraulic separator HWK 60-1 1/4"

Flow rates up to 4 m³/h

- Material: S235 carbon steel
- Zinc flake coated chamber flZn-nc-480h acc. DIN EN ISO 10683
- Insulation for heating or cooling with 0,6 mm galvanised sheet steel jacket
- Supply/return and boiler/consumer markings stamped into sheet steel jacket
- Bleeding and flushing/filling/emptying connections

Technical specification

Boiler connections	internal thread G 1 1/4"
Consumer connections	internal thread G 1 1/4"
Insulation _{Heating}	EPS 25 mm (DIN 4102-B2)
Insulation _{Cooling}	FEF 19 mm (EN 14304)
Max. working temperature _{EPS}	90 °C
Max. working temperature _{FEF}	85 °C
Max. working pressure	6 bar
Bleeding	internal thread G 1/2"
Flushing/filling/emptying	internal thread G 1/2"

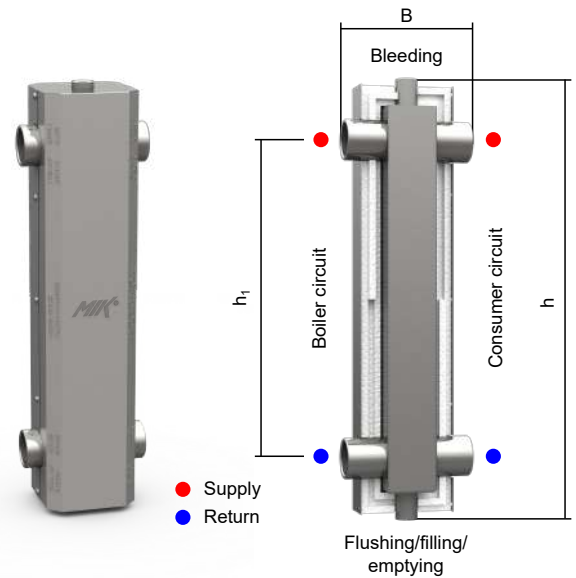

Type	Built-in height h [mm]	Built-in width B [mm]	Distance of boiler and consumer connections h ₁ [mm]	Code
HWK 60-1 1/4"	522	152	375	850 008

Hydraulic separator HW 60/125-1 1/4"

Flow rates up to 3 m³/h


- Material: S235 carbon steel
- Zinc flake coated chamber flZn-nc-480h acc. DIN EN ISO 10683
- Insulation for heating or cooling with 0,6 mm galvanised sheet steel jacket
- Supply/return and boiler/consumer markings stamped into sheet steel jacket
- Temperature sensor connection
- Equipped with two 1 1/4" union flat seat fittings



Technical specification

Boiler connections	internal thread G 1 1/4"
Consumer connections	external thread R 1 1/4"
Insulation _{Heating}	EPS 25 mm (DIN 4102-B2)
Insulation _{Cooling}	FEF 19 mm (EN 14304)
Max. working temperature _{EPS}	90 °C
Max. working temperature _{FEF}	85 °C
Max. working pressure	6 bar
Temperature sensor	internal thread G 1/2"

- Supply
- Return

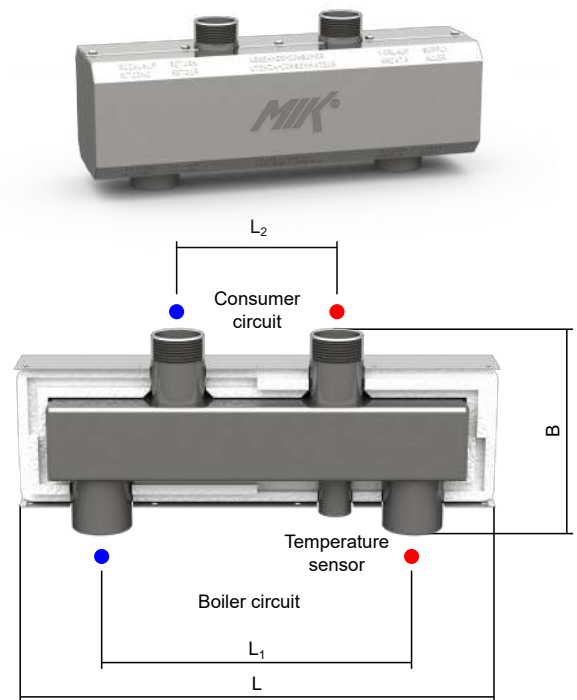

Type	Built-in length L [mm]	Built-in height B [mm]	Boiler connections distance L ₁ [mm]	Consumer connections distance L ₂ [mm]	Code
HW 60/125-1"	381	158,5	250	125	850 011

MIK Wall mountings H-HV

- 100 or 150 mm distance from separator centre to wall
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- The kit includes screws and dowels
- Pack contents 2 pcs.
- Code: **840 007** (100 mm)
840 008 (150 mm)

