


Combined supply-return manifold HV 60/125 SG



Up to 50 kW output at the temperature difference 20 °C and flow rate 2,3 m³/h

- 2 to 3 heating/cooling circuits
- Boiler connections underneath
- Consumer connections above
- Supply and return connections located side by side
- Compact construction with integrated supply and return
- Material: S235 carbon steel
- Zinc flake coated chambers flZn-nc-480h acc. DIN EN ISO 10683
- Insulation for heating or cooling with 0,6 mm galvanised sheet steel jacket
- Supply and return markings stamped into sheet steel jacket
- Boiler safety group connection
- Expansion tank/drain valve connection

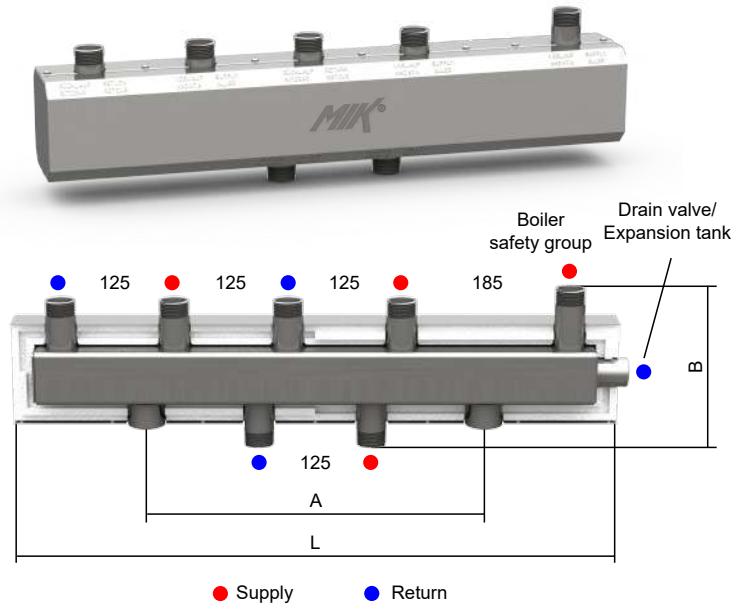

Technical specification

Boiler connections	external thread R 1"	Max. working temperature _{FEF}	85 °C
Consumer connections	external thread R 1"	Max. working pressure	6 bar
Expansion tank/drain valve	internal thread G ¾"	Connections distance	125 mm
Boiler safety group	external thread R 1"	Installation height, B	178 mm
Insulation _{Heating}	EPS 25 mm (DIN 4102-B2)	Insulation height	115 mm
Insulation _{Cooling}	FEF 19 mm (EN 14304)	Produced acc.	2014/68/EU
Max. working temperature _{EPS}	90 °C	Pressure drop: for approximate data see HV 60/125	

Type		Built-in length L [mm]	Offset of supports A [mm]	Consumer units	Code
	HV 60/125 SG-2	670	375	2	840 001
	HV 60/125 SG-3	920	375	3	840 002

MIK Wall mountings L-HV 100-150

- 100 or 150 mm distance from manifold centre to wall
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- The kit includes screws, dowels, washers and damping elements
- Pack contents 2 pcs.
- Code: **840 009**



MIK Wall mountings H-HV

- 100 or 150 mm manifold centre distance to wall
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- The kit includes screws and dowels
- Pack contents 2 pcs.
- Code: **840 007** (100 mm)
840 008 (150 mm)

