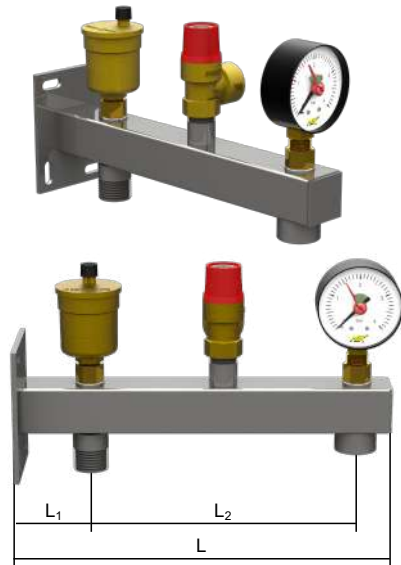
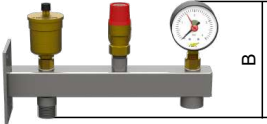




## Multi-function units for expansion tanks UWK

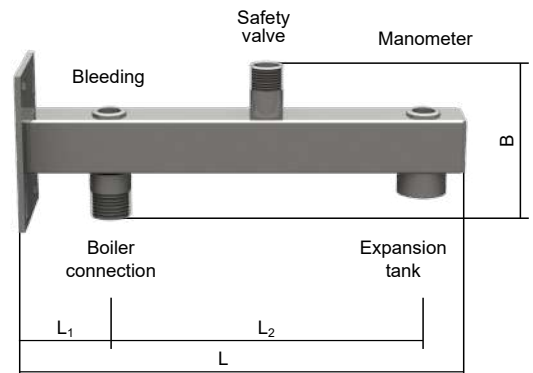
- Mounting assembly for self-contained heating or solar systems
- Boiler connection: external thread R 3/4"
- Expansion tank connection: internal thread G 3/4"
- Expansion tank is connected via an automatic quick-disconnect coupling
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- Ready for use - equipped with:
  - manometer Ø63 with automatic shut-off valve
  - 3/8" quick air bleeding system with automatic shut-off valve
  - safety valve



	Type	Built-in length L [mm]	Offset L <sub>1</sub> [mm]	Offset L <sub>2</sub> [mm]	Built-in height B [mm]	Safety valve	Manometer	Code
	UWK 1	280,5	55	200	160	1/2"/3 bar	Ø63/4 bar/3/8"	<b>860 122</b>
 Equipped with quick-disconnect coupling 3/4" (code <b>Brza spojnica SK 3/4</b> )	UWK 1 SK	280,5	55	200	190	1/2"/3 bar	Ø63/4 bar/3/8"	<b>860 124</b>
 For solar systems	UWK S	280,5	55	200	160	1/2"/6 bar	Ø63/10 bar/1/4"	<b>860 125</b>

## Steel chamber console for UWK

- Application in self-contained heating and solar systems
- Boiler connection: external thread R 3/4"
- Bleeding connection: internal thread G 3/8"
- Expansion tank connection: internal thread G 3/4"
- Expansion tank is connected via an automatic quick-disconnect coupling
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)



Type	Built-in length L [mm]	Offset L <sub>1</sub> [mm]	Offset L <sub>2</sub> [mm]	Built-in height B [mm]	Manometer connection	Safety valve connection	Code
UWK 1 console	280,5	55	200	99	internal thread G 3/8"	external thread R 1/2"	<b>860 103</b>
UWK 2 console	280,5	55	200	69	internal thread G 3/8"	internal thread G 1/2"	<b>860 104</b>
UWK S console	280,5	55	200	99	internal thread G 1/4"	external thread R 1/2"	<b>860 106</b>