


## Combined supply-return manifold HV 60/125

Up to 50 kW output at a temperature difference 20 °C and flow rate 2,3 m<sup>3</sup>/h


- 2 to 6 heating/cooling circuits
- Boiler connections underneath
- Consumer connections above
- Supply and return connections located side by side
- Compact construction with integrated supply and return
- Material: S235 carbon steel
- Zinc flake coated chambers flZn-nc-480h acc. DIN EN ISO 10683
- Insulation for heating or cooling with 0,6 mm galvanised sheet steel jacket
- Supply and return markings stamped into sheet steel jacket



- Supply
- Return

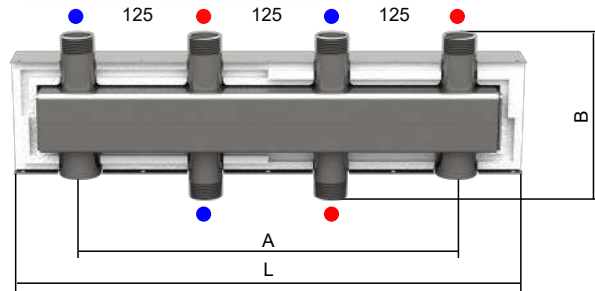

Pressure drop diagram

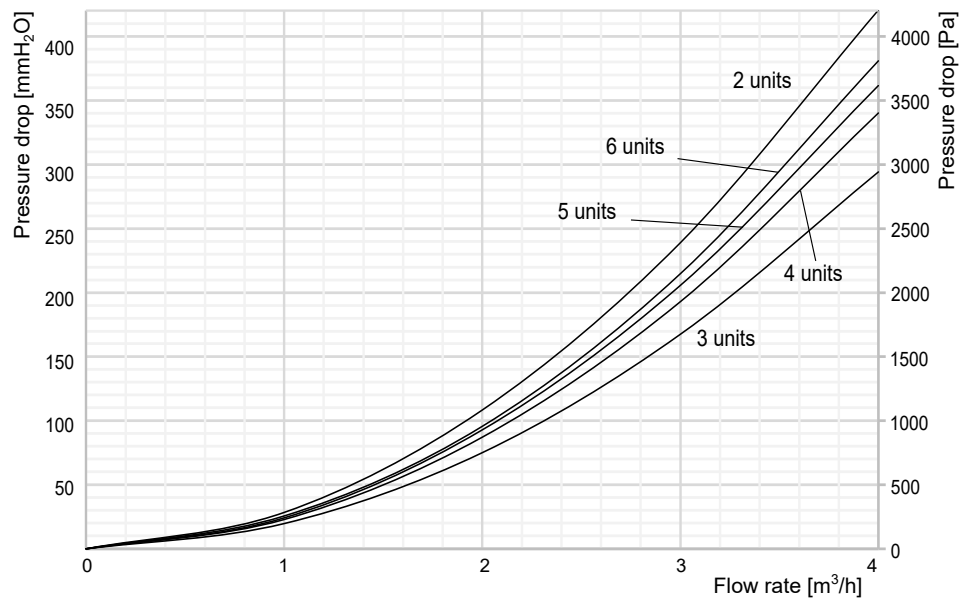

### Technical specification

Boiler connections	external thread R 1"
Consumer connections	external thread R 1"
Insulation <sub>Heating</sub>	EPS 25 mm (DIN 4102-B2)
Insulation <sub>Cooling</sub>	FEF 19 mm (EN 14304)
Max. working temperature <sub>EPS</sub>	90 °C
Max. working temperature <sub>FEF</sub>	85 °C
Max. working pressure	6 bar
K <sub>vs</sub> value	20,9
Connections distance	125 mm
Installation height, B	165 mm
Insulation height	115 mm
Produced acc.	2014/68/EU

Type	Built-in length L [mm]	Offset of supports A [mm]	Consumer units	Code
HV 60/125-2	506	375	2	<b>840 003</b>
HV 60/125-3	756	375	3	<b>840 004</b>
HV 60/125-4	1006	625	4	<b>840 005</b>
HV 60/125-5	1256	625	5	<b>840 006</b>
HV 60/125-6	1506	875	6	<b>840 014</b>



### MIK Wall mountings L-HV 100-150

- 100 or 150 mm distance from manifold centre to wall
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- The kit includes screws, dowels, washers and damping elements
- Pack contents 2 pcs.
- Code: **840 009**



### MIK Wall mountings H-HV

- 100 or 150 mm manifold centre distance to wall
- Galvanized (HRN EN ISO 2081) and chromated (DIN 50962)
- The kit includes screws and dowels
- Pack contents 2 pcs.
- Code: **840 007** (100 mm)  
**840 008** (150 mm)

