


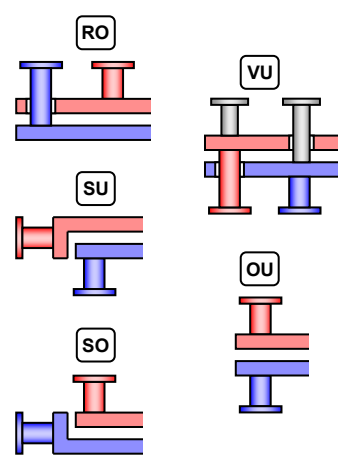



Enquiry/order form: Combined supply and return manifold with intermediane insulation HVI

Manifold size A	Manifold connections size	Max. manifold connections size	Flow rate	Output at $\Delta t=20^{\circ}\text{C}$	Maximum manifold connections are possible in the following configurations:	Manifold length <input style="width: 100%;" type="text"/> mm
<input type="checkbox"/> 80	DN25	DN40	2,3 - 3,3 m ³ /h	50 - 75 kW	 <p>The number of maximum connection sizes is limited to 2.</p>	Max. operating pressure excess <input style="width: 100%;" type="text"/> bar
<input type="checkbox"/> 100	DN32	DN50	4 - 6,5 m ³ /h	90 - 150 kW		Max. temperature <input style="width: 100%;" type="text"/> °C
<input type="checkbox"/> 120	DN50	DN65	8,5 - 13 m ³ /h	190 - 290 kW		Insulation choice:
<input type="checkbox"/> 160	DN65	DN80	14 - 19,3 m ³ /h	315 - 435 kW		<input type="checkbox"/> Galvanised sheet steel jacket
<input type="checkbox"/> 200	DN80	DN100	19,3 - 32 m ³ /h	435 - 725 kW		<input type="checkbox"/> polystyrene EPS 35 mm (DIN 4102-B2) - HVI80 only
<input type="checkbox"/> 250	DN100	DN125	32 - 49 m ³ /h	725 - 1100 kW		<input type="checkbox"/> rock wool (MW-EN 13162-T6-WL(P)-AF30-SD20-CP5)
<input type="checkbox"/> 300	DN125	DN200	49 - 86 m ³ /h	1100 - 1950 kW		<input type="checkbox"/> 50 mm <input type="checkbox"/> 100 mm
<input type="checkbox"/> 400	DN150	DN200	71,8 - 120 m ³ /h	1625 - 2700 kW		<input type="checkbox"/> vapour barrier FEF 19 mm (EN 14304)
<input type="checkbox"/> 500	DN200	DN300	120 - 263 m ³ /h	2700 - 5955 kW		<input type="checkbox"/> _____

Wall brackets
 A = mm
 (For HVI 80-120, A = 160 or 220 mm)

Stands
 H = mm

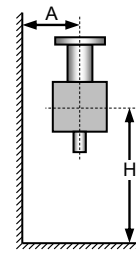

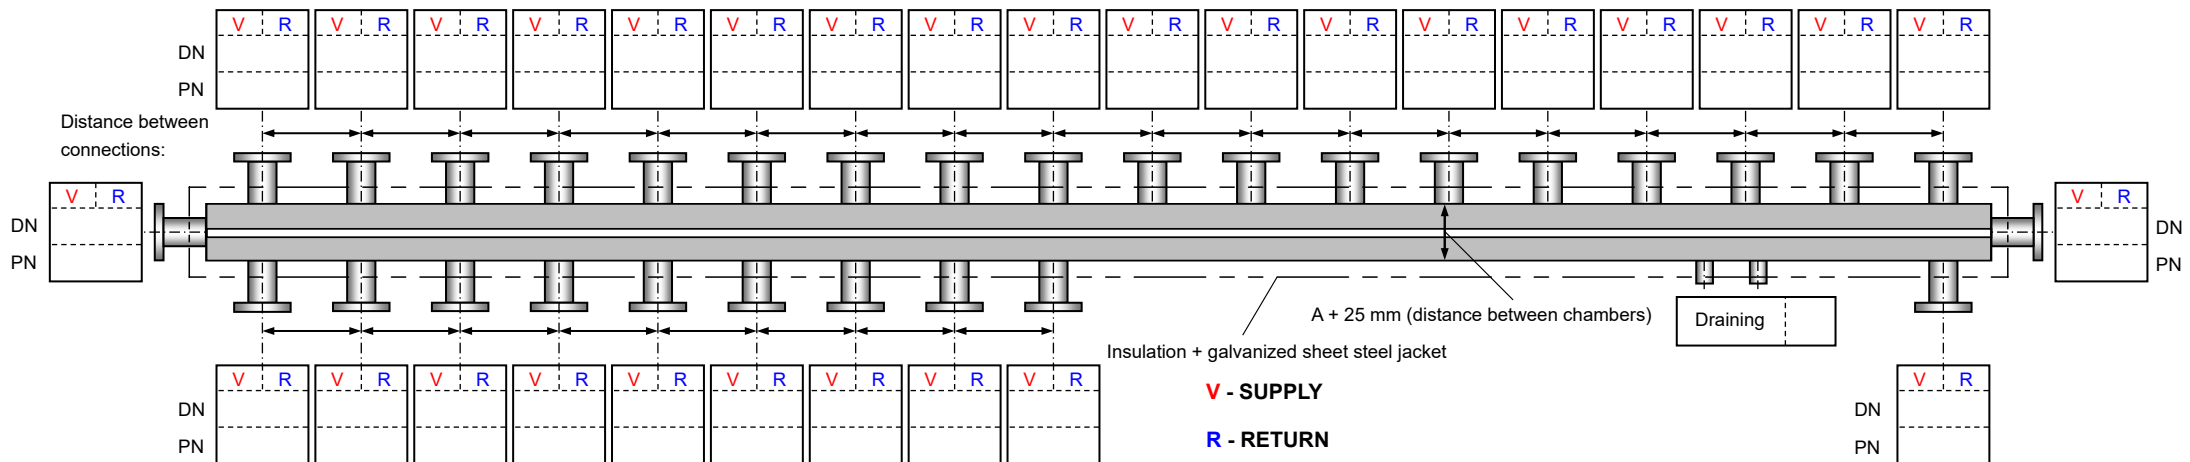

REMARKS: